



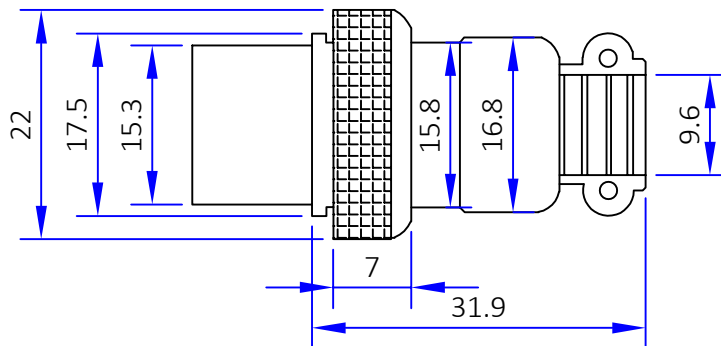


版本	描述	绘制	日期	核准
A	首次发行	Fu	2023/05/11	\




Contact Arrangement	2Pin	3Pin	4Pin	5Pin	6Pin	7Pin	8Pin	9Pin	10Pin	12Pin	14Pin	15Pin
Rated Current	15A	15A	10A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Working Voltage (AC.V.rms)	250	250	200	200	200	200	200	200	200	200	200	200
Withstand Voltage (AC.V) 1min	1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000
Contact Resistance	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ
Insulation Resistance	≥1500MΩ	≥1500MΩ	≥1500MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ

Note:		公差	X. ±0.20 X.X ±0.10 X.XX ±0.05 Angular ±5°	VOMAC	WWW.VOMAC.COM.CN	
					+86 15718014206	
绘制: Fu Liu	日期: 23/05/11	视图		品名: GX20 母头连接器		
审核:				单位	mm	料号: VM-GX20-3P
核准:		比例	1 : 1	客户料号: /		页码:1 OF 1

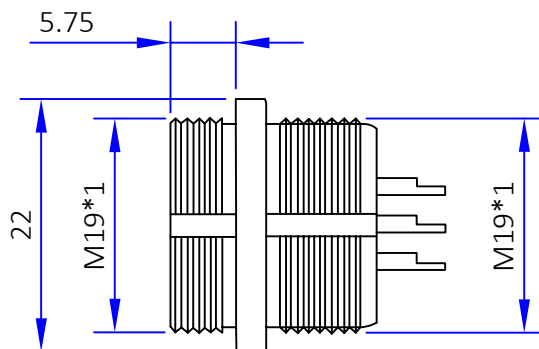

Contact Arrangement	2Pin	3Pin	4Pin	5Pin	6Pin	7Pin	8Pin	9Pin	10Pin	12Pin	14Pin	15Pin
Rated Current	15A	15A	10A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Working Voltage (AC.V.rms)	250	250	200	200	200	200	200	200	200	200	200	200
Withstand Voltage (AC.V) 1min	1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000
Contact Resistance	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ
Insulation Resistance	≥1500MΩ	≥1500MΩ	≥1500MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ

Note:		公差	X. ±0.20 X.X ±0.10 X.XX ±0.05 Angular ±5°	VOMAC	WWW.VOMAC.COM.CN	
					+86 15718014206	
绘制: Fu Liu	日期: 23/05/12	视图		品名: GX20 公头连接器		
审核:		单位	mm	料号: VM- GX20-3P		版本 A
核准:		比例	1 : 1	客户料号: /		页码:1 OF 1