

VMFMT5N Series Tunable Notch Filters

SPECIFICATIONS


Part Number	Tuning Range (MHz)	Insertion Loss (dB)	3dB BW (MHz)	40dB BW Min. (MHz)	Rejection (dB)	CW Power (W)
VMFMT5N-24/48M-2.5M-N/N	24-48	1	2.5	0.1	50	100
VMFMT5N-48/95M-6M-N/N	48-95	1	6	0.3	50	100
VMFMT5N-95/163M-6M-N/N	95-163	1	6	0.3	50	100

Parameter	Function	Parameter	Function
Filter Order	5 sections	Passband VSWR	≤ 2
Impedance	50 Ω	Dial Accuracy	$\pm 1\%$
RF Connector	N-K		

Contact us for customize requirements.

OUTLINE DRAWING

Appendix 1: VMFMT5N-24/48M and VMFMT5N-48/95M Outline Drawing.

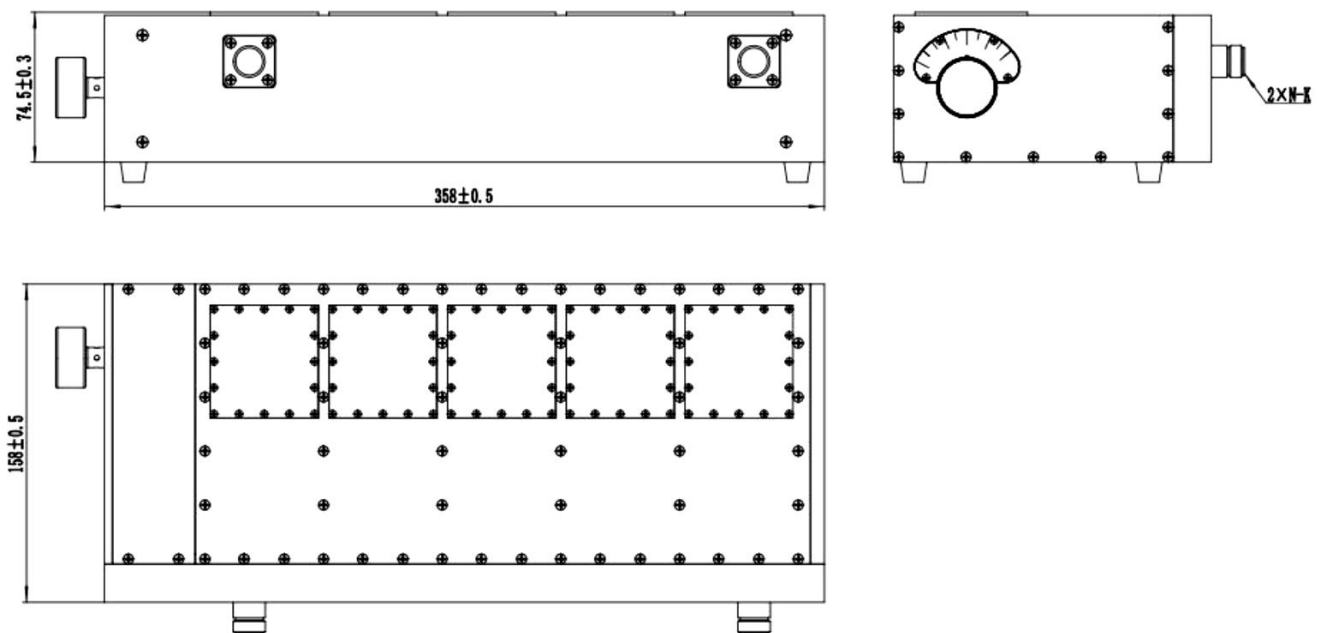

Appendix 2: VMFMT5N-95/163M Outline Drawing

