

## VMPD-2-2G/12G-SMAF

### FEATURES

- ◆ Broadband 2 ~ 12GHz
- ◆ Small Package

### TYPICAL APPLICATIONS


- ◆ Test & Measurement
- ◆ Multimarket



### SPECIFICATIONS

PARAMETER	PERFORMANCE	CONDITIONS
Freq.	2 ~ 12GHz	
Insertion Loss	$\leq 1.0\text{dB}$	Excluding theoretical loss 3.0dB
Input Port VSWR	$\leq 1.4$	Input Port (Combiner)
Output Port VSWR	$\leq 1.3$	Output Port (Splitter)
Isolation	$\geq 18\text{dB}$	
Amplitude Balance	$\leq \pm 0.3\text{dB}$	
Phase Balance	$\leq \pm 4^\circ$	
Impedance	50 Ohms	
Port Connectors	SMA-Female	
Operating Temperature	$-45^\circ\text{C} \sim +85^\circ\text{C}$	
Surface Finishing	Black Paint	
Size	47*24*10mm	
Weight	32g	

OUTLINE AND SIZE

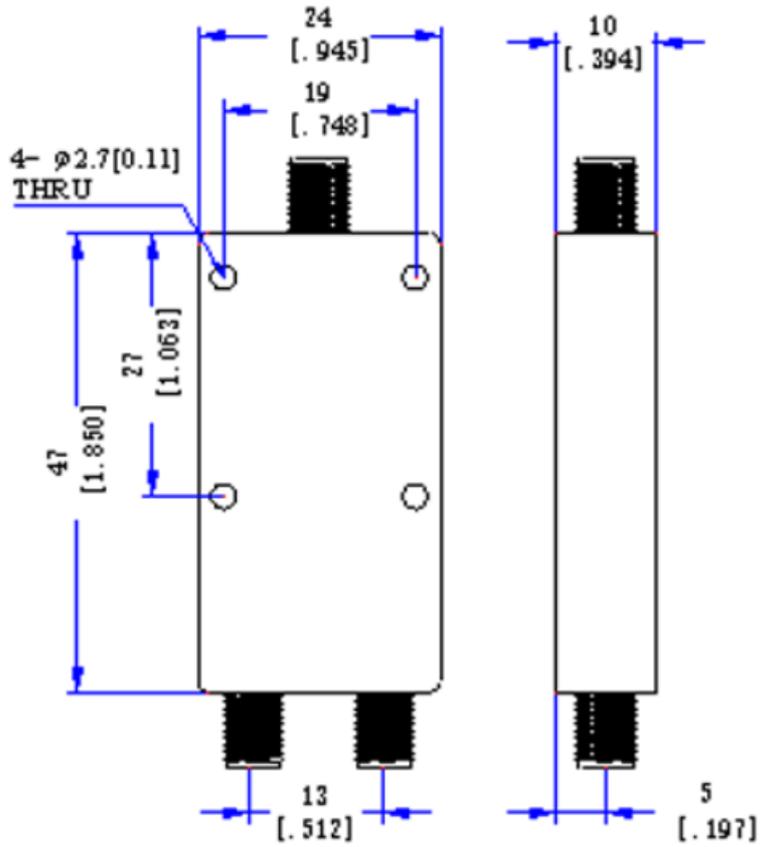

Note: Dimensions (mm / [inch]), General tolerance (+0.3)