

## VMPD-2-1G/26.5G-2.92F

### FEATURES

- ◆ Broadband 1 ~ 26.5GHz
- ◆ Small Package

### TYPICAL APPLICATIONS


- ◆ Test & Measurement
- ◆ Multimarket



### SPECIFICATIONS

PARAMETER	PERFORMANCE	CONDITIONS
Freq.	1 ~ 26.5GHz	
Insertion Loss	≤ 1.5dB	Excluding theoretical loss 3.0dB
Input Port VSWR	≤ 1.8	Input Port (Combiner)
Output Port VSWR	≤ 1.5	Output Port (Splitter)
Isolation	≥ 16dB	
Amplitude Balance	≤ ±0.4dB	
Phase Balance	≤ ±5°	
Impedance	50 Ohms	
Total Input Power	30W	Splitter
	1W	Combiner
Port Connectors	2.92-Female	
Operating Temperature	-45°C~+85°C	
Surface Finishing	Black Paint	
Size	78*26*10mm	
Weight	70g	

OUTLINE AND SIZE

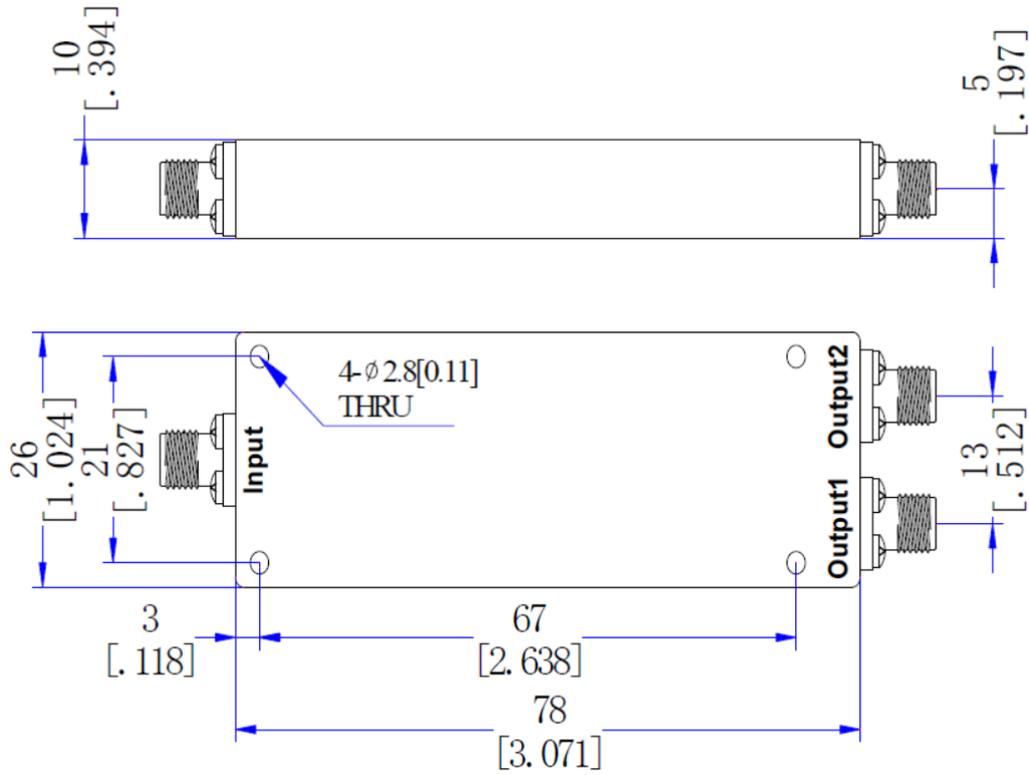

Note: Dimensions (mm / [inch]), General tolerance (+0.3)