

VMPD-2-1G/40G-2.92F

FEATURES

- ◆ Broadband 1 ~ 40GHz
- ◆ Small Package

TYPICAL APPLICATIONS


- ◆ Test & Measurement
- ◆ Multimarket



SPECIFICATIONS

PARAMETER	PERFORMANCE	CONDITIONS
Freq.	1 ~ 40GHz	
Insertion Loss	$\leq 1.8\text{dB}$	Excluding theoretical loss 3.0dB
Input Port VSWR	≤ 1.8	Input Port (Combiner)
Output Port VSWR	≤ 1.6	Output Port (Splitter)
Isolation	$\geq 16\text{dB}$	
Amplitude Balance	$\leq \pm 0.4\text{dB}$	
Phase Balance	$\leq \pm 5^\circ$	
Impedance	50 Ohms	
Total Input Power	20W	Splitter
	1W	Combiner
Port Connectors	2.92-Female	
Operating Temperature	$-45^\circ\text{C} \sim +85^\circ\text{C}$	
Surface Finishing	Black Paint	
Size	78*26*10mm	
Weight	70g	

OUTLINE AND SIZE

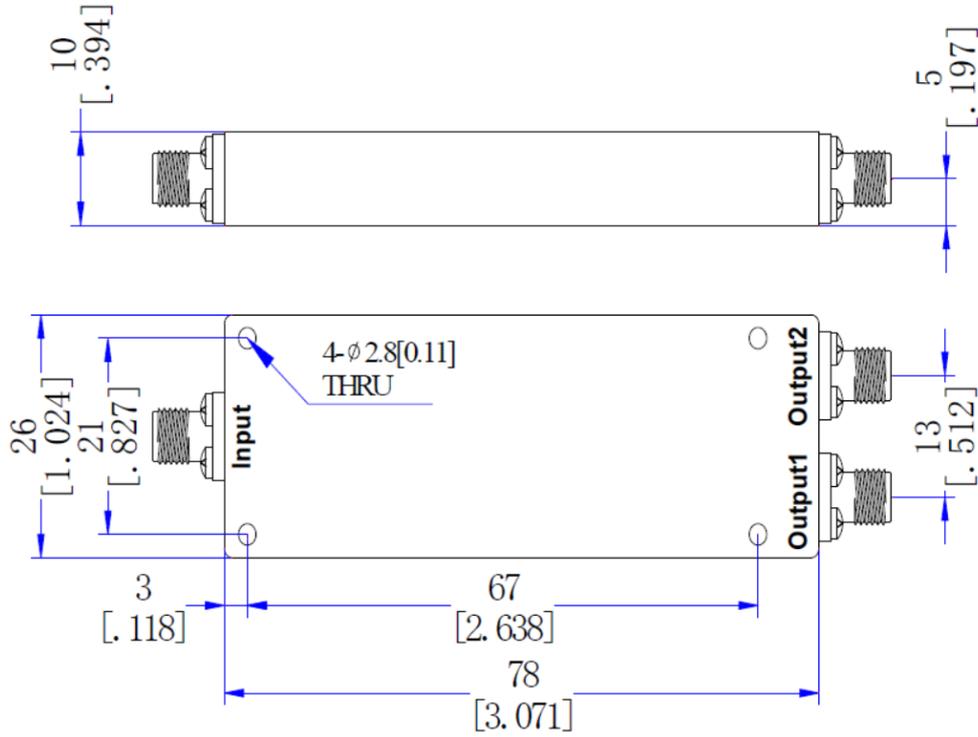

Note: Dimensions (mm / [inch]), General tolerance (+0.3)