

VMPD-4-500M/26.5G-SMAF

FEATURES

- ◆ Broadband 500MHz ~ 26.5GHz
- ◆ Small Package

TYPICAL APPLICATIONS


- ◆ Test & Measurement
- ◆ Multimarket



SPECIFICATIONS

PARAMETER	PERFORMANCE	CONDITIONS
Freq.	0.5 ~ 26.5GHz	
Insertion Loss	≤4dB	Excluding theoretical loss 6.0dB
Combined Port VSWR	≤2.3	
Distribution Port VSWR	≤1.8	
Isolation	≥11dB (500-800M)	
	≥15dB (800-26500M)	
Amplitude Balance	≤±1.0dB	
Phase Balance	≤±10°	
Impedance	50 Ohms	
Total Input Power	20W	Splitter
	1W	Combiner
Port Connectors	SMA-Female	
Operating Temperature	-45°C~+85°C	
Surface Finishing	Black Paint	
Size	143*68*10mm	
Weight	280g	

OUTLINE AND SIZE

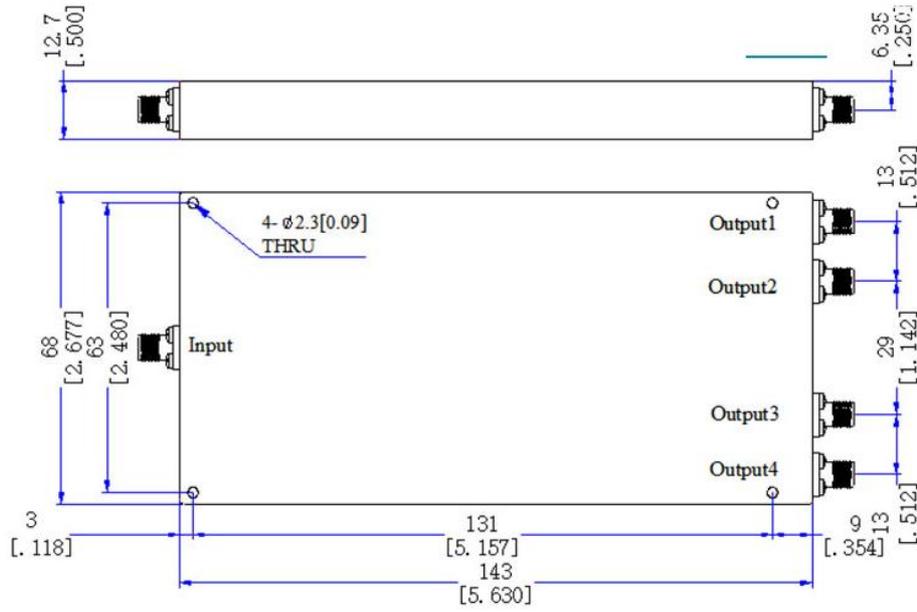

Note: Dimensions (mm / [inch]), General tolerance (+0.3)