

VMPD-6-2G/18G-SMAF

FEATURES

- ◆ Broadband 2 ~ 18GHz
- ◆ Small Package

TYPICAL APPLICATIONS


- ◆ Test & Measurement
- ◆ Multimarket



SPECIFICATIONS

PARAMETER	PERFORMANCE	CONDITIONS
Freq.	2 ~ 18GHz	
Insertion Loss	≤2.6dB	Excluding theoretical loss 7.8dB
Combined Port VSWR	≤1.5	
Distribution Port VSWR	≤1.5	
Isolation	≥16dB	
Amplitude Balance	≤±0.6dB	
Phase Balance	≤±8°	
Impedance	50 Ohms	
Total Input Power	20W	Splitter
	1W	Combiner
Port Connectors	SMA-Female	
Operating Temperature	-45°C~+85°C	
Surface Finishing	Blue Paint	
Size	109*76*10mm	
Weight	300g	

OUTLINE AND SIZE

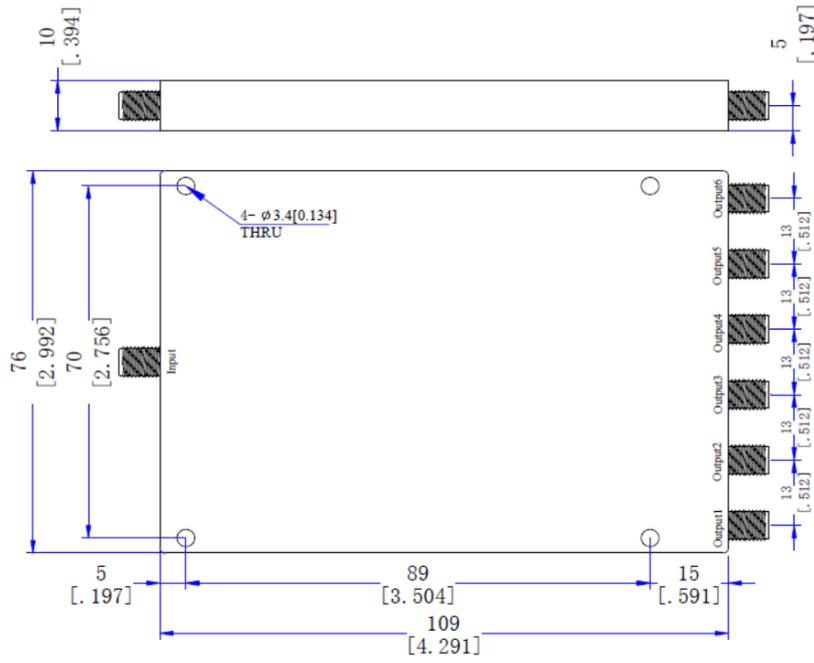

Note: Dimensions (mm / [inch]), General tolerance (+0.3)