


VMTE-DC/40G-1W-2.92M-X

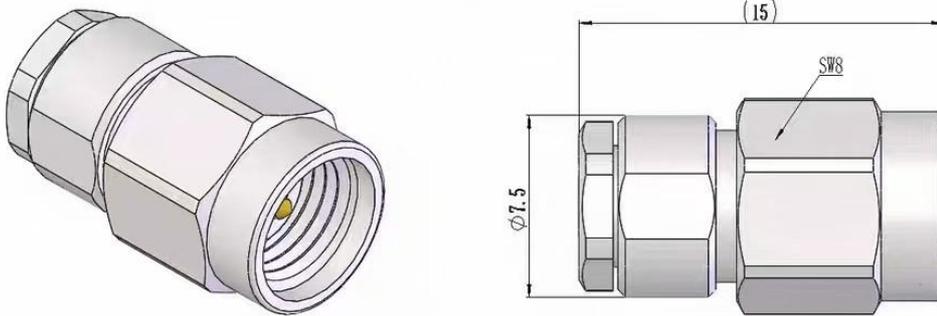

GENERAL SPECIFICATIONS

Parameter	Function	
Impedance	50Ω	
Frequency	DC ~ 40GHz	
VSWR (X, 4 grades)	VMTE-DC/40G-1W-2.92M-A	≤1.1 (Grade A)
	VMTE-DC/40G-1W-2.92M-B	≤1.15 (Grade B)
	VMTE-DC/40G-1W-2.92M-C	≤1.2 (Grade C)
	VMTE-DC/40G-1W-2.92M-D	≤1.3 (Grade D)
Power Handling	0.5W~1W	

MATERIALS

Part	Material	Plating
Shell	Stainless Steel	Passivated
Nut	Stainless Steel	Passivated
Inner Conductor	Beryllium Copper	Gold
Insulator	PEI or PEEK	