

## VMCSM-5/5-18-B-SF


### FEATURES

- ◆ Frequency range DC – 18GHz
- ◆ VSWR: 2.0
- ◆ High isolation 60dB Typ.
- ◆ High reliability
- ◆ Ethernet Control

### PRODUCT OVERVIEW

The VOMAC custom 5x5 mechanical switch matrix operates from DC to 18 GHz in a standard 4U chassis. Designed for active device testing, it features autonomous mounting, stable and reliable performance, and a 10ms switching speed.

Control is via Ethernet.

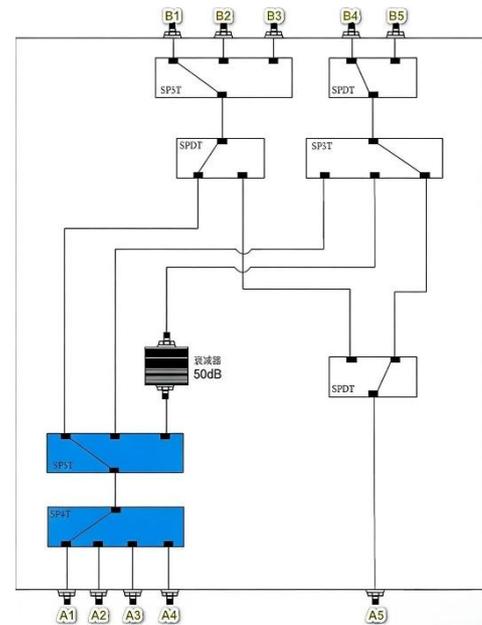

### SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Unit
Frequency Range	DC	-	18	GHz
VSWR	-	-	2.0	:1
Isolation	-	60	-	dB
COM Ports	-	-	5	/
Channel Ports	-	-	5	/
Input Power	-	-	80	W
Voltage Supply	110	-	240	VAC
Control Interface	Ethernet			
RF Channel Connector	SMA - Female			
Operating Temperature	- 25 °C ~ + 65 °C			
Storage Temperature	- 55 °C ~ + 85 °C			
Size	482x88x450 (19 inches, 2U)			
Color	Navy Gray/Computer White			

**SCHEMATIC DIAGRAM OF THE DEVICE**

<p>Front Panel Effect of the Device</p>	
<p>Rear Panel Effect of the Device</p>	